
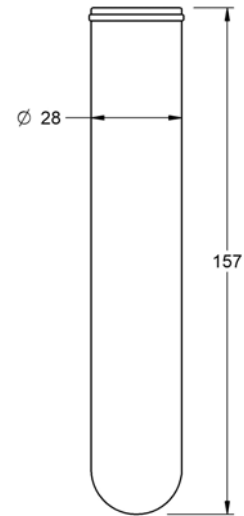


INCR

**FLOAT
LEVEL
SWITCH**

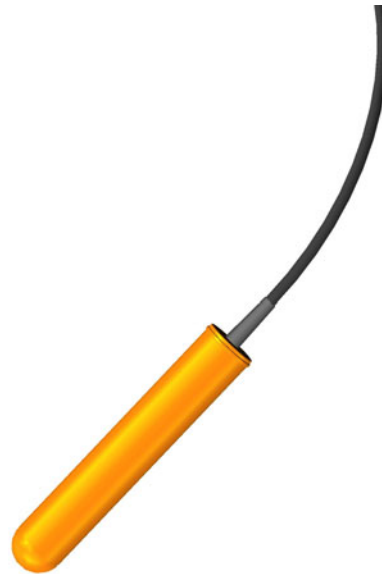


Function	Control of maximum or minimum level when filling or emptying.
Application	Reduced dimension. Reed contact
Process connection	When the float goes up or down by the action of the liquid, the contact opens or closes the electrical
Characteristics of contact	4A / 230VAC. Micro-switch commute
Density of product	0,9 Kg/dm ³
Operating temperature	+60 °C
Pressure	1 bar
Protection	IP 68
Float material	Polyethylene, orange color
Cable	PVC electric hose (3 x 0,75 mm ²)
Reference / Cable length	INCR-02 : 2m INCR-05 : 5m INCR-10 : 10m
Dimensions	Ø 28x157 mm

ACCESSORIES




Top screw	1" BSP (PVC)
Connector	PG7 (Polyamide)

Installation examples

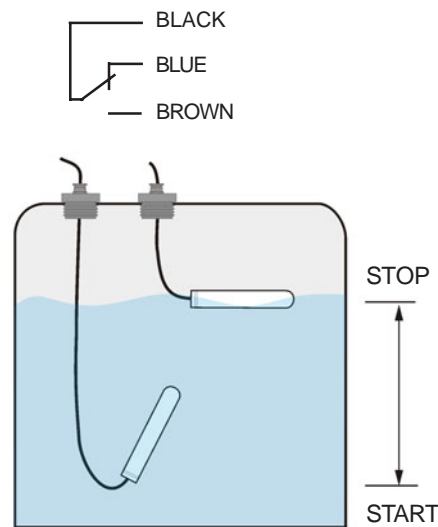

FILLING
Stop filling, start emptying

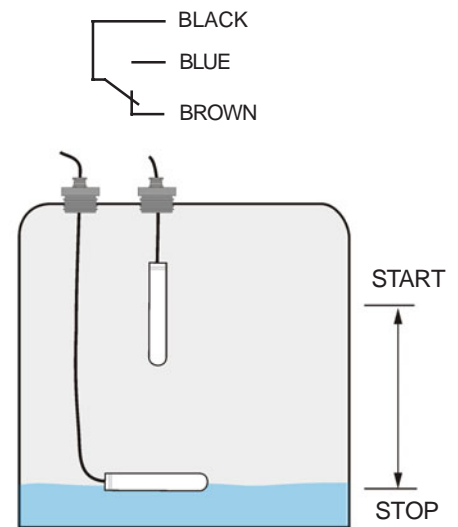

EMPTYING
Start filling, stop emptying

Microlectra bv.
Augustapolder 12.
2992 SR Barendrecht
The Netherlands
www.microlectra.com
info@microlectra.nl